


NOVAFIX®

DOUBLE-LOCKING WEDGES

NEW

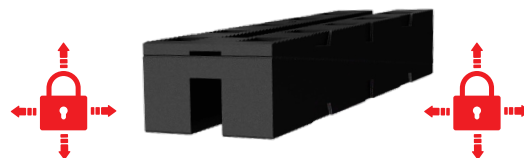

BENEFITS

- Unique locking mechanism that ensures the wedge does not slip sideways during installation
- Time-saving installation that ensures a stable base, accurate distance adjustment and levelling
- Not affected by moisture, rot or mould
- Does not emit toxic smoke in case of fire
- Very high load-bearing capacity
- Made of high-quality impact resistant, halogen-free UV-stabilized Polypropylene
- Manufactured in Denmark

TECHNICAL INFORMATION

Type	Colour	H (mm)	W (mm)	L (mm)	Height, min. (mm)	Height 35%	Height 100%	Recommended application range (min/max) mm	Ref. no.	EAN
Wedge 1	green	9,5	28	65	10	16	12	10-16	701010	5701925701014
Wedge 2	orange	14	32	80	12	19	14	12-19	701020	5701925701021
Wedge 3	red	17	45	93	17	28	20	17-28	701030	5701925701038
Wedge 4	black	26	45	150	24	41	29	24-41	701040	5701925701045

Tinvej 11, DK-4100 Ringsted

www.tillex.com

+45 45 89 12 66

tillex@tillex.dk

tillex®

MADE IN DENMARK SINCE 1954